




CREATAS  
INTERNATIONAL

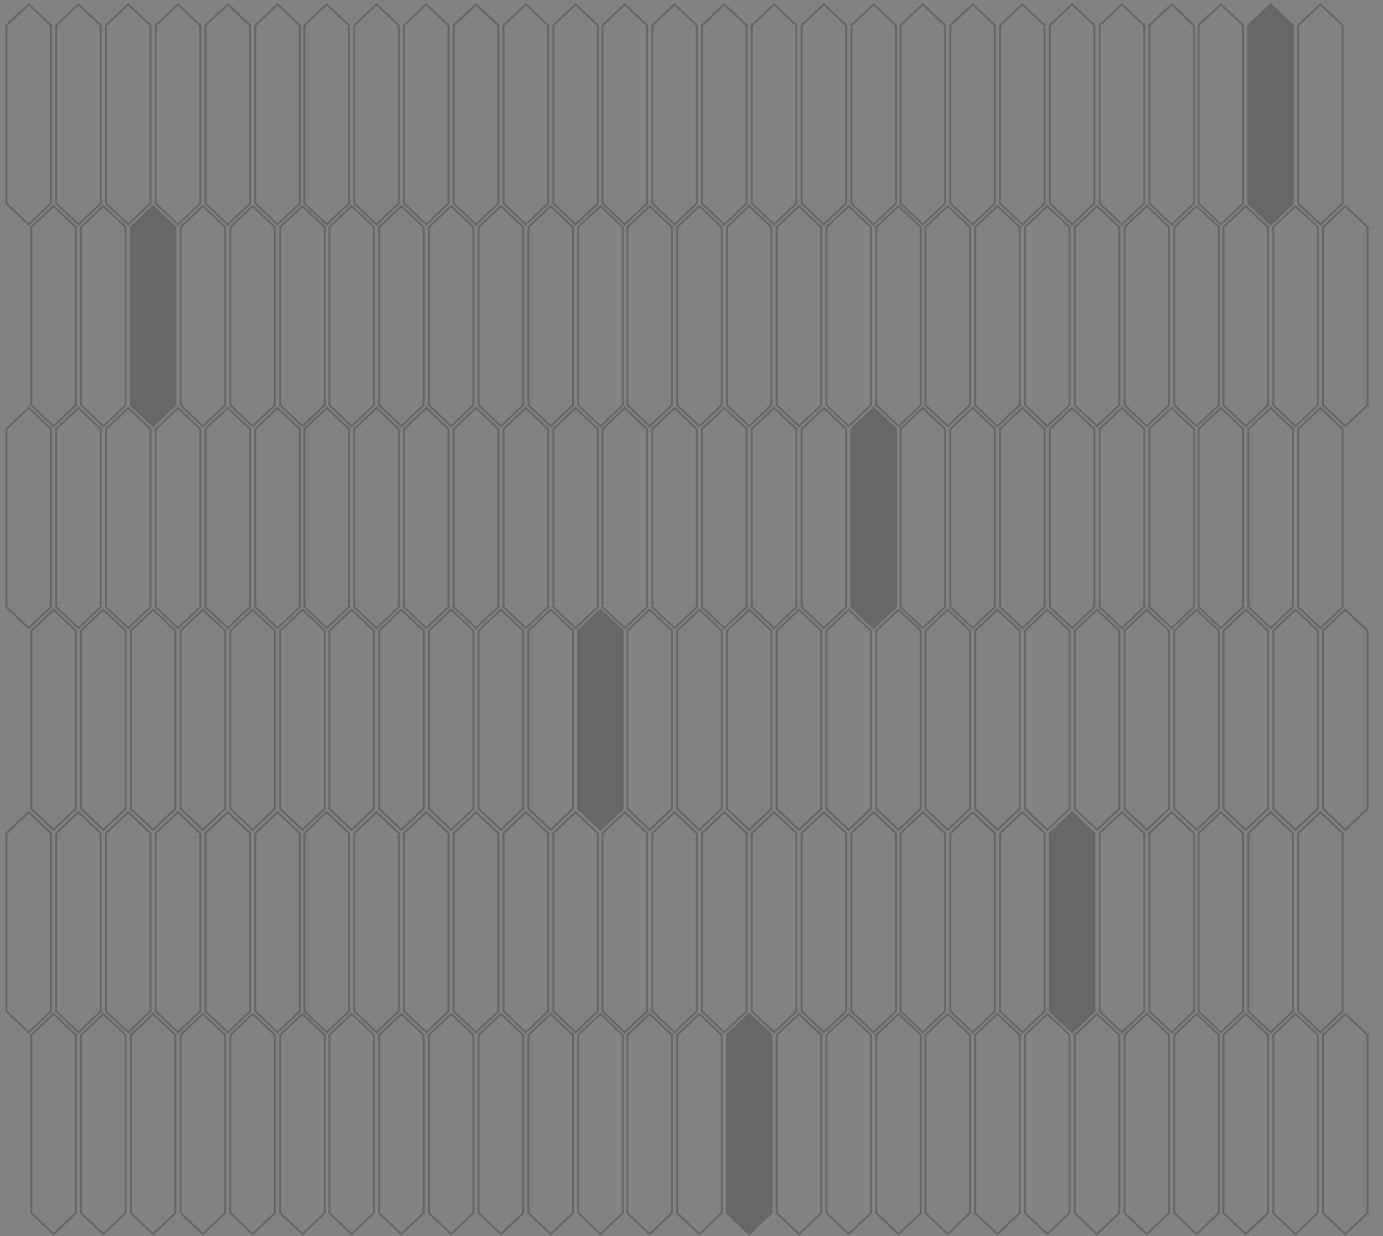



# MILAGRO COLLECTION

50X250MM (GLOSSY)

# MILAGRO

COLLECTION

Dive into a world of possibilities with our collection of a spectrum of vibrant colorful tiles. Offering 10 distinctive colors, each tile is a canvas of style, suited for diverse tastes and spaces.

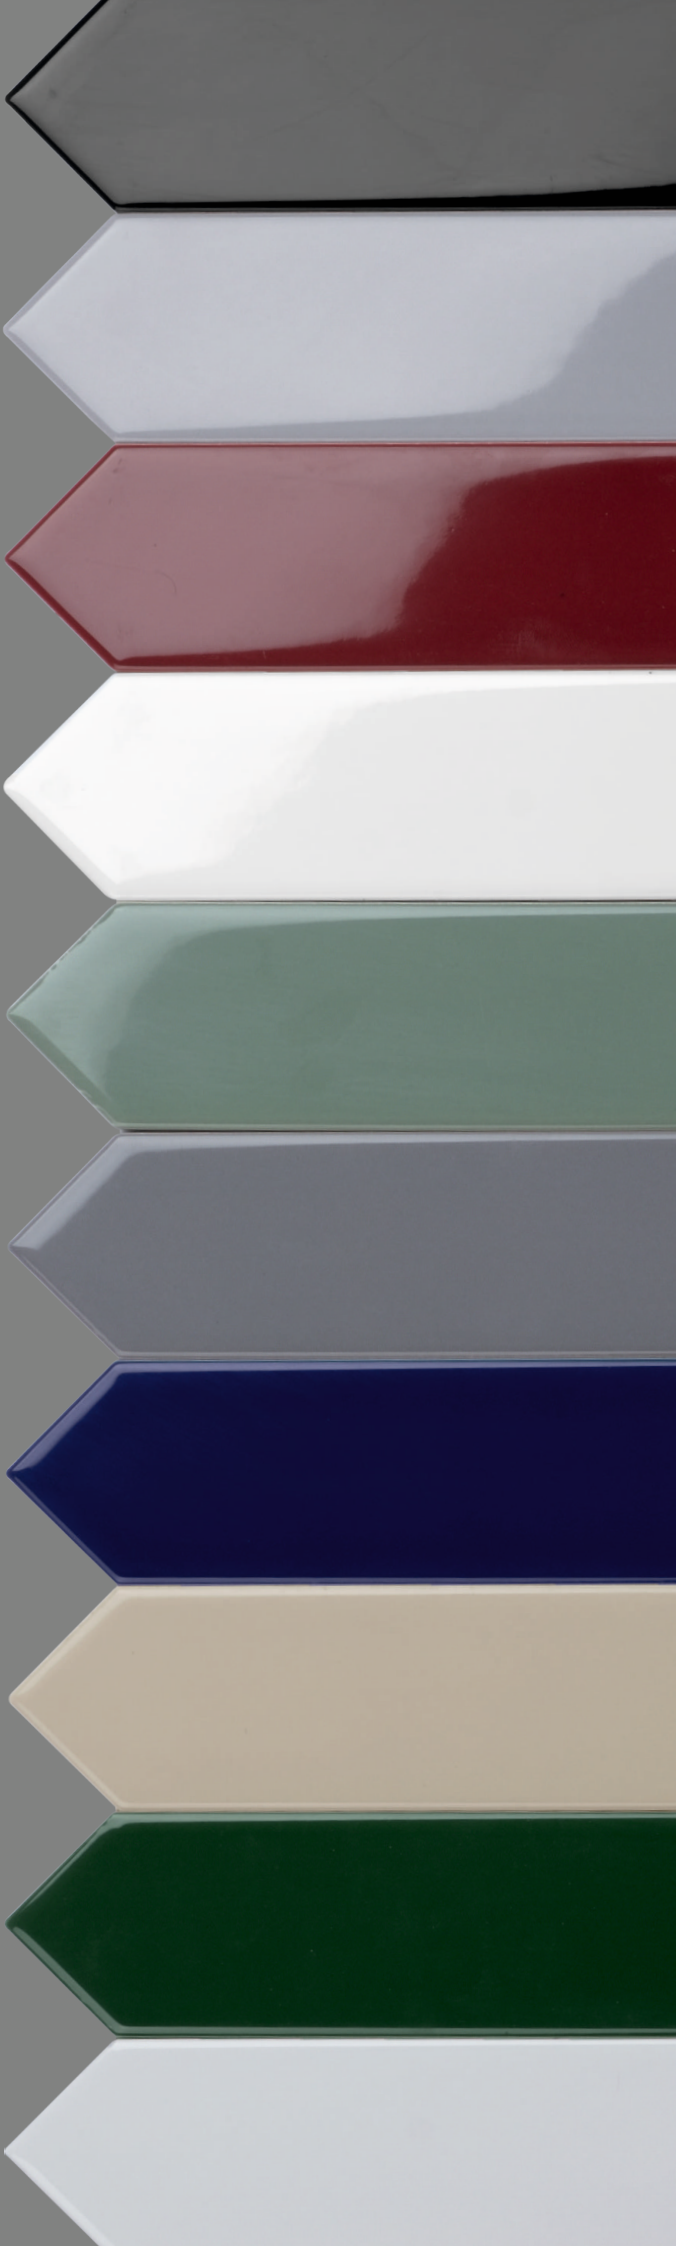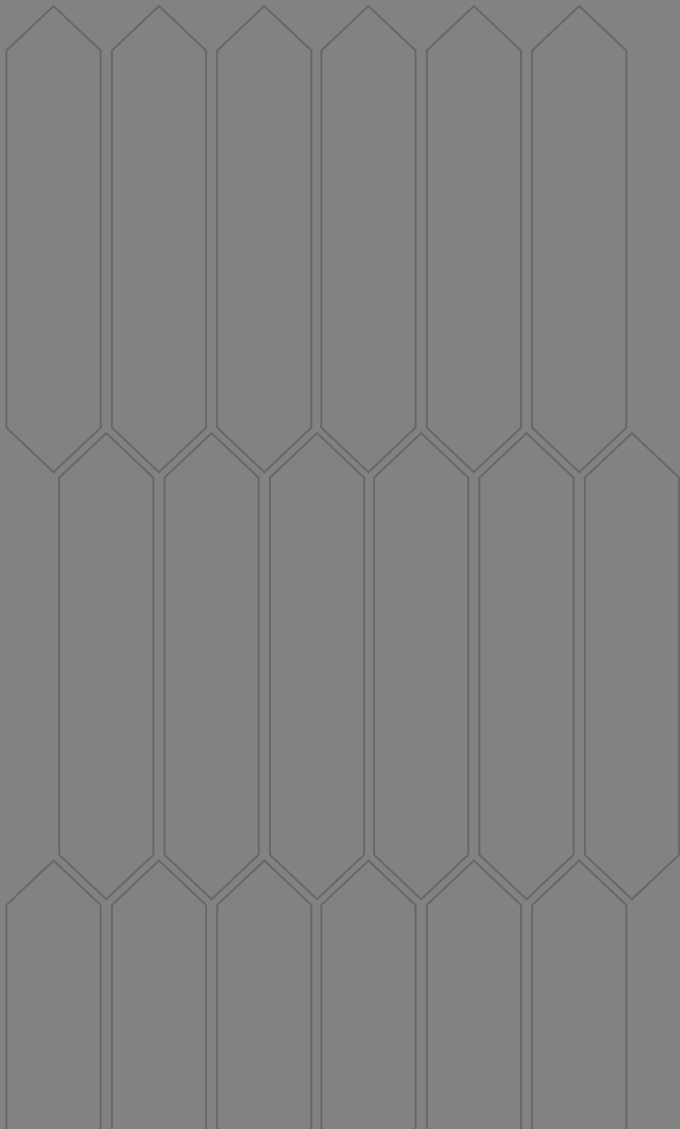



[ MILAGRO WHITE ]



[ MILAGRO CLOUD GREY ]



[ MILAGRO DOLPHIN GREY ]

SIZE.  
**50X250MM**


SURFACE  
**GLOSSY**



**WALL  
TILE**



[ MILAGRO OSCURO GREY ]

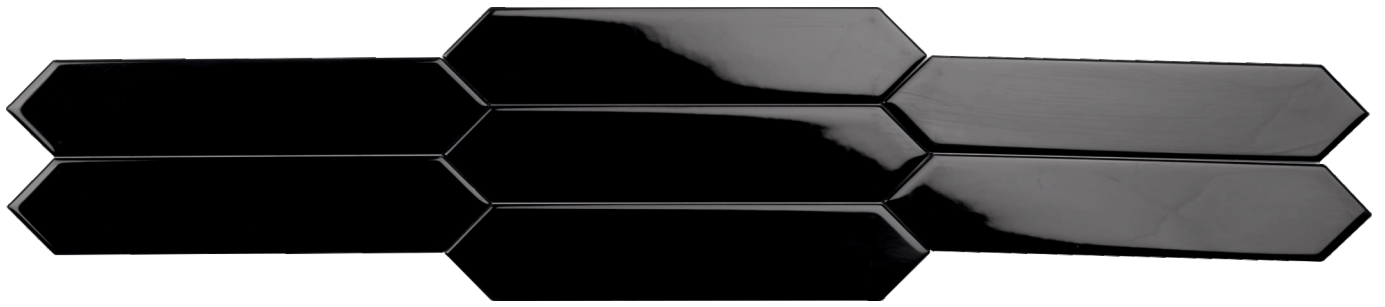

[ MILAGRO JET BLACK ]



[ MILAGRO CASTLE SAND ]


SIZE.  
**50X250MM**

SURFACE  
**GLOSSY**



**WALL  
TILE**



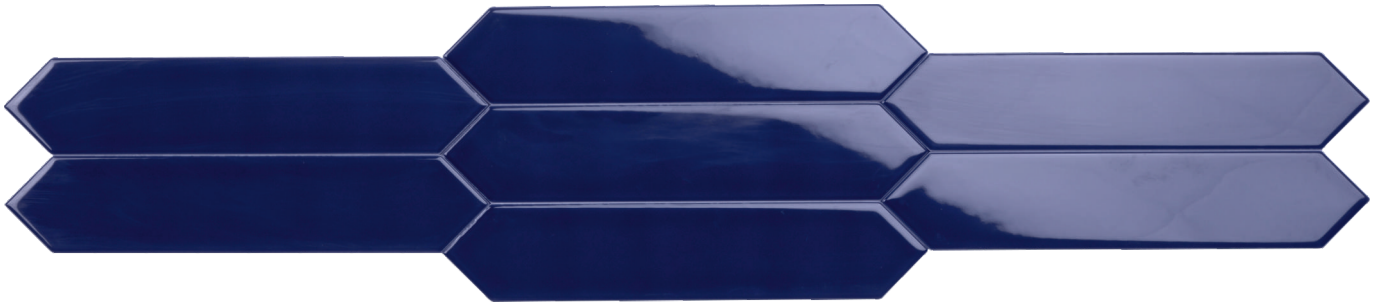

[ MILAGRO ESTRELLA BLUE ]



[ MILAGRO CHERRY RED ]



[ MILAGRO BOTTELA GREEN ]

SIZE.  
50X250MM

SURFACE  
GLOSSY



WALL  
TILE



[ MILAGRO DUCK EGG ]

SIZE.  
**50X250MM**

SURFACE  
**GLOSSY**



**WALL  
TILE**





MILAGRO WHITE





MILAGRO DOLPHIN GREY





MILAGRO OSCURO GREY





MILAGRO JET BLACK





MILAGRO CASTLE SAND





MILAGRO ESTRELLA BLUE





MILAGRO CHERRY RED





MILAGRO BOTTELA GREEN

# TECHNICAL SPECIFICATION as per ISO 13006:2018 - ANNEX L

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.13%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 2.74%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.38%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.28%	ISO-10545-2
5	Water Absorption	>10%	11.70%	ISO-10545-3
6	MOR	Minimum 12 N/mm <sup>3</sup>	15.95 N/mm <sup>3</sup>	ISO-10545-4
7	Breaking Strength	Minimum 600 N	740.31 N	ISO-10545-4
8	Surface Quality	Minimum 95%	100%	ISO-10545-2
9	Density (g/cc)	Minimum 2.2	2.2528 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GB ( PASS )	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle ( PASS ) Fully Resistance	ISO-10545-11
12	Thermal Shock Resistance	10 cycle	10 cycle ( PASS ) Fully Resistance	ISO-10545-9
13	Coefficient of Linear Thermal Expansion	Maximum $9 \times 10^{-6}$	$5.15 \times 10^{-6}$	ISO-10545-8
14	Small colour differences (Plain Colour Tiles)	GL < 0.75	GL < 0.55	ISO-10545-16
15	Resistance to Staining	Min Class - 3	Class 4	ISO-10545-14
16	Resistance to Low Concentration of Acid & Alkali	Class GLA	Class GLA	ISO-10545-13
17	Resistance to Low Concentration of Acid & Alkali	Class GHA	Class GHA	ISO-10545-13
18	Household Chemical Resistance	Minimum Class B	Class GA	ISO-10545-13
19	Swimming Pool Salt	Minimum Class B	Class GA	ISO-10545-13
20	Lead and Cadmium Release	Maximum 0.1mg/dm <sup>2</sup>	0.008mg/dm <sup>2</sup>	ISO-10545-15

## PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
50X250MM (2"X10")	8.00MM	22	0.25	2.70	4.00

### Note :

- Size / shade variation is inherent in ceramic tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

### Exterior Elevation or interior Walls





CREATAS  
INTERNATIONAL

Email : [exports@creatasint.com](mailto:exports@creatasint.com)

Contact No : +91 9607777877

Web : [www.creatasint.com](http://www.creatasint.com)